


Acoustics » Acoustic Tiles




Brand: Zintra

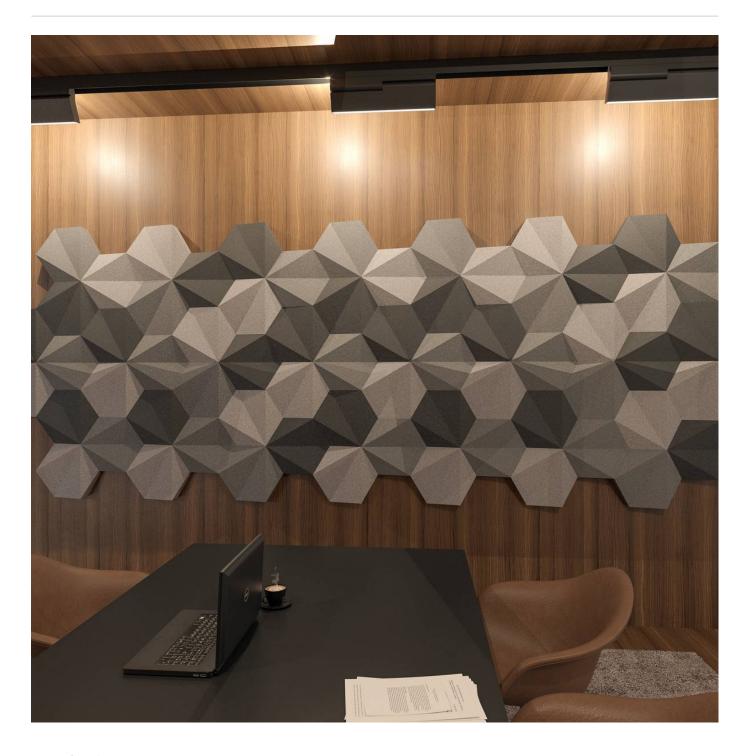

BOX HEX

Acoustics » Acoustic Tiles

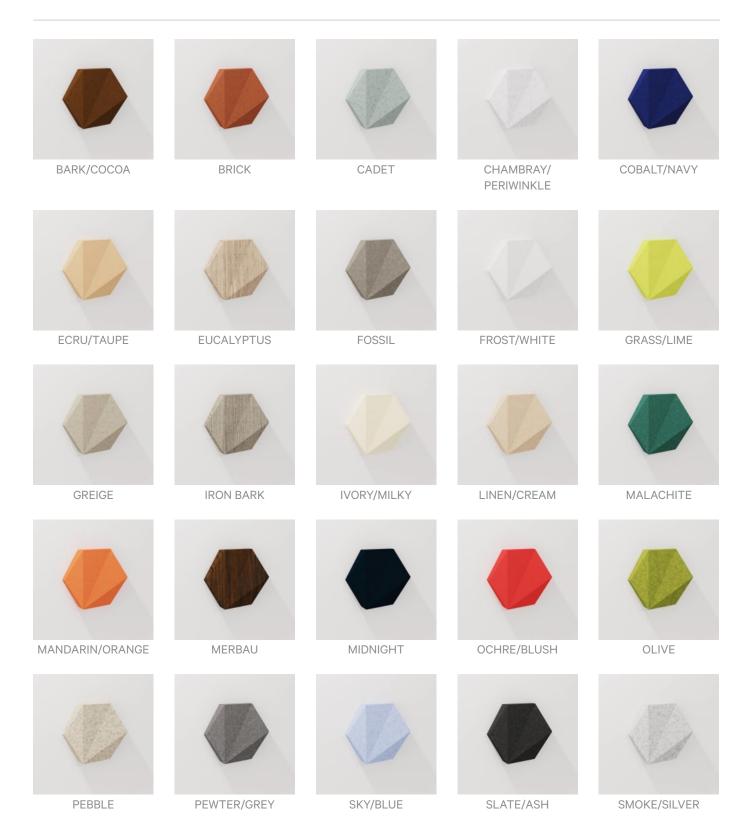

2 of 5

BOX HEX

Acoustics » Acoustic Tiles








SUNSHINE/YELLOW



TAR/BLACK

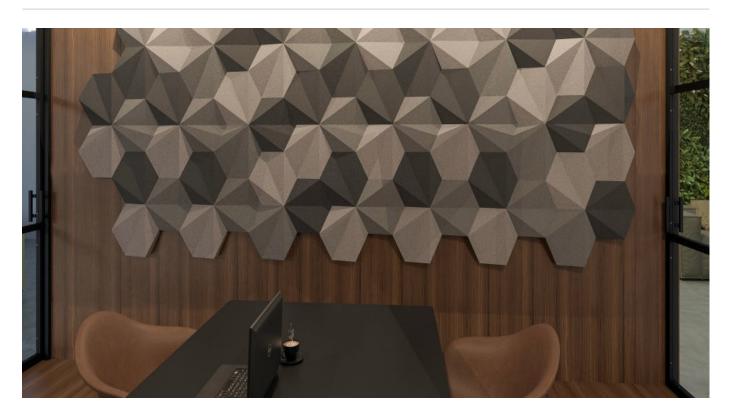

Zintra Box Tiles come in a range of standard sizes and depths that make them easy on the eye and easy to install. Hex is available in 28 colours.

Absorbs Noise	Bleach Cleanable Environmentally Friendly		
• Extended Warranty	Solution Dyed Yarns		
Description	With a range of standard sizes and depths, Box Tiles give your walls dimension, colour and the acoustic benefits of Zintra.		
	Easy to layout, mix and match, and install, their versatility is an effective addition to any wall.		
	Check out the Zintra 12mm colour range in the DOWNLOADS		
Dimensions	12 tiles / set, 1.1m² 381mm w x 330mm h x 76mm d / tile		
Composition	Zintra Acoustic Panel - 100% Solution Dyed (Colour Through) Polyester. 2.3 kg/m²		
Finishes	Zintra Panel - Matt. Check out the Zintra 12mm colour range in the DOWNLOADS		
Environmental Info	Easily recycled through standard recycling channels		





Fire Rating	Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification required by the Building Code of Australia for the control of fire spread on interior wall and ceiling linings.
	Classification - Group 1 Specific Extinction - Less than 250m²/kg
Warranty	5-year warranty. Visit baresque.com.au/warranty for complete details.
Lead Time	• 2-3 weeks.
	Additonal 1-week for Western Australia.
Suggested Installation	Supplied assembled as individual Zintra Box Tile, including dual lock fastener screwed into the back of each.
	Arrange as required with included install template and fit to wall with supplied fasteners (no screws supplied).
	Download the Handling and Installation guide for full instructions.
Fabrication Techniques	Stanley knife and straight edge
How to Specify	1. Zintra Colour
Care Instructions	Vacuum to remove dust.
	Dab Zintra with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.
	For difficult stains, use a solution of household bleach (10% bleach / 90% water). To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.
Customisable	The Zintra Acoustic Solutions range is customisable to your project. Please get in touch with your local contact for details.
Additional Comments	NRC - 0.45 - 0.80. Indoor only. Also available with Digital Print. Not suitable as a free standing product.

