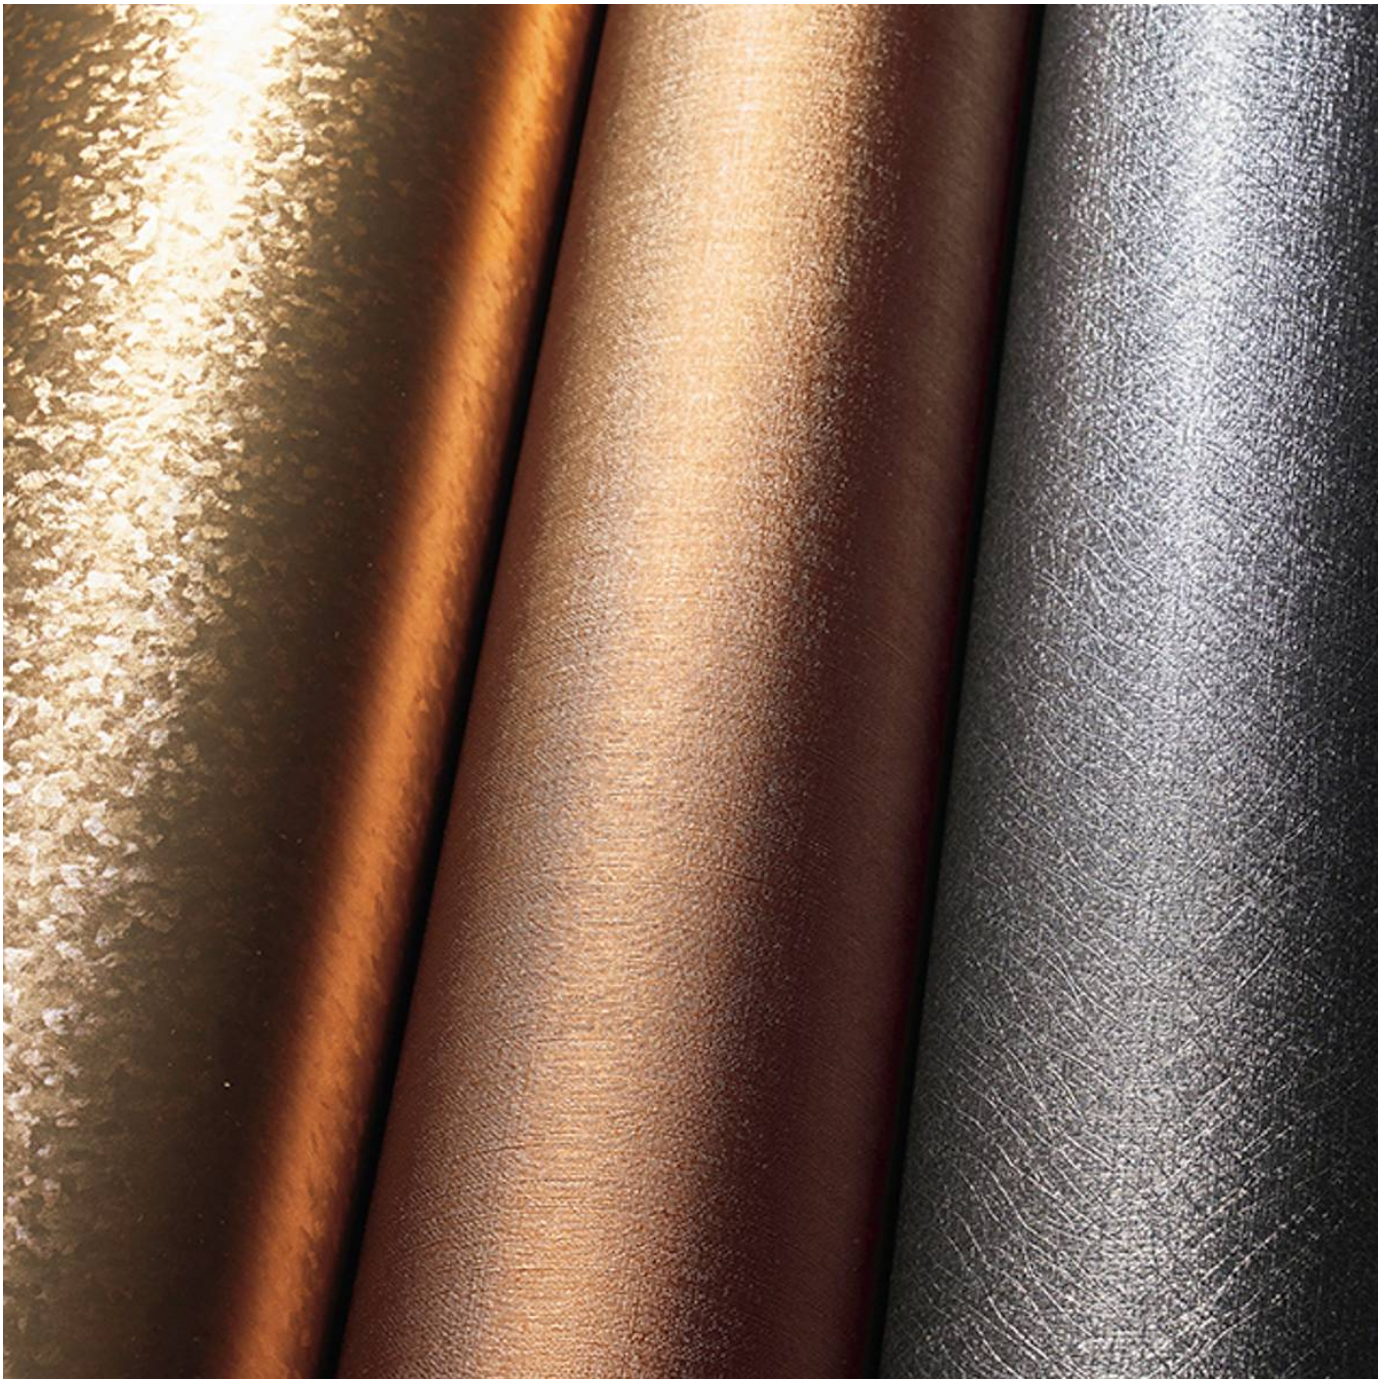
METALLIC



Brand: **Reatec**

Applications: **Walls, Joinery**

1300 306 399
info@baresque.com.au
baresque.com.au

baresque

METALLIC

The Reatec Metallic Collection is an Aluminium-metallized product developed with high luminance creating a beautiful look and textured design appeal.

✓ **Bleach Cleanable**

Description

Reatec is a durable and realistic architectural film with a pressure sensitive adhesive and air removal system backing.

Utilising state of the art, multi layer printing and minute embossing, its appearance is almost indistinguishable from real wood or stone. Reatec is stain and solvent/ chemical resistant, anti-bacterial, anti-mould, colorfast, washable, scrubbable, and abrasion resistant.

A pdf with full Reatec Test Results can be found on the product Downloads tab on the website. Reatec can be stretched to cover the corners and curves and is suitable for both indoor and outdoor uses including kitchens and bathrooms.

Go to the DOWNLOADS tab for our Reatec Additional Spec Sheet and Installation Guide.

Composition

Reatec is a durable and realistic architectural film with a pressure sensitive adhesive and air removal system backing 350 g/m²

Pattern Repeat Size

N/A

Roll Size

122cm wide x 50m - Available by the lineal metre

Fire Rating

Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification required by the Building Code of Australia for the control of fire spread on interior wall and ceiling linings.

Classification - Group 1
Specific Extinction - Less than 250m²/kg

Lead Time

- 2-weeks (approx.) from Wednesday, subject to stock availability.
- Additional 1-week for Western Australia.
- Express delivery is available subject to a surcharge. Contact Baresque for details and pricing.

METALLIC

Suggested Installation

Reatec is a specialised product and should only be installed by a trained installer.

It is strongly recommended that the installation instructions from our product downloads are read and understood.

As Reatec is a thin film, the substrate should be prepared as smooth as possible to avoid visible unevenness.

Reatec can be installed and repaired on-site, resulting in almost no downtime for both interior and exterior applications.

Feel free to contact Baresque with any installation questions.

Care Instructions

Wipe material with a clean, soft cloth dampened with a mild solution of liquid detergent and warm water. Repeat using only clean water, then dry with a lint free cloth.

Avoid using wax polishes, solvents or concentrated abrasives.

For more difficult stains, dampen a soft white cloth with a solution of household bleach (10% bleach / 90% water). Rub gently. Rinse with a water dampened cloth to remove bleach concentration.

Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.


Warranty

2-year warranty. Visit **baresque.com.au/warranty** for complete details.

METALLIC

Colour & Finish Options


RD5522



RD5523


RD5524


RD5525


RD5526


RD5527


RD5528


RD5529


RD5530


RD5531


RD5533


RD5534


RD5535


RD5536


RD5537



RD5538


RD5539



RD5540

TR4371

TR4372


TR4374


TR4378


TR4379


TR4384



RD5521

1300 306 399
info@baresque.com.au
baresque.com.au


baresque

METALLIC


TR4385


TR4388


TR4390



TR4392



TR4393



TR4395



TR4398


TR4415


TR4416


TR4417


TR4418


TR4419



TR4420



TR5151



TR5152


TR5154


TR5155



TR5161



TR5162


TR5163


TR5541


TR5542


TX4403


TX4404


TX4407


1300 306 399
info@baresque.com.au
baresque.com.au


baresque

METALLIC



TX4408


TX4412



TX4461



TX4464


TX4465


TX4469

TX5156


TX5158


TX5160

TX4467

1300 306 399
info@baresque.com.au
baresque.com.au

baresque