LENOX

Brand: **Versa**

Applications: **Walls**

LENOX

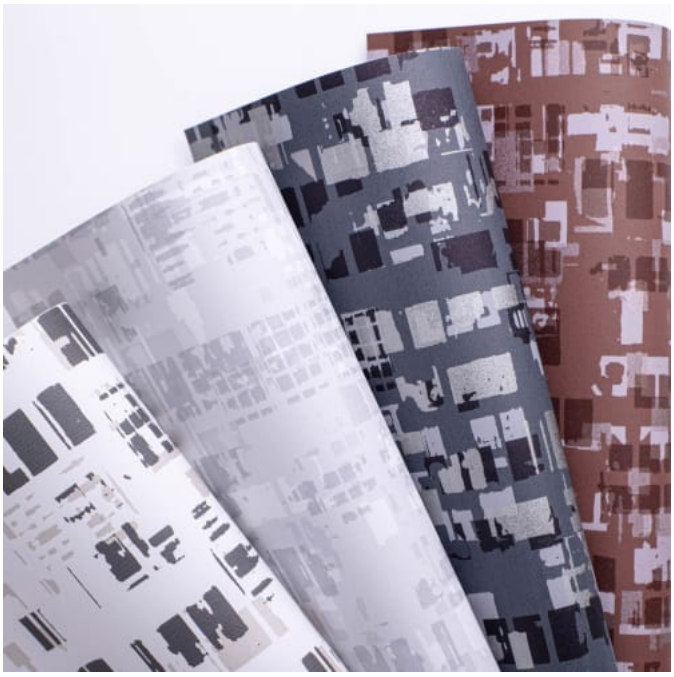

LENOX

Lenox's dynamic pattern of abstract shapes and metallics evokes urban architecture in 12 modern neutrals and bold accents, adding movement to any space.

- ✓ **Bleach Cleanable**
- ✓ **EPD Certified**
- ✓ **Low VOC**
- ✓ **HPD Certified**

Description

Inspired by building architecture, Lenox is a dynamic pattern composed of shapes in varying scales, tones, and hints of metallics.

The overlapping abstracted motifs foster a sense of movement and provide an untraditional approach to a city scene.

The palette offers 12-skus including modern neutrals and bold, corporate-driven accents.

Composition

Vinyl face on a woven backing 20oz (452 g/m²)

Environmental Info

Formaldehyde free

Heavy metals free

Perfluorooctanoic acid free

No solvent inks

Low VOC emissions. Any VOCs dissipate quickly (faster than paint) through normal ventilation and have no recognised adverse impact on indoor air quality.

Durability means products do not need to be replaced regularly due to wear and tear and being cleanable, vinyl products are ideal for helping keep commercial environments clean of bacteria.

Baresque will only deal with vinyl manufacturers that comply with applicable state and federal regulations, provide a factory that is safe and clean for its employees to work in, recycle scrap and inks during the manufacturing process to minimize waste related to production.

Roll Size

132/137cm x 27.4m - Available by the lineal metre.

Weight

452 g/m²

Fire Rating

Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification as required by the Building Code ofAustralia for the control of fire spread on interior wall and ceiling linings.

Classification - Group 3
Specific Extinction - Less than 250m²/kg

LENOX

Lead Time	• 2-weeks (approx.) from Wednesday, subject to stock availability. • Additional 1-week for Western Australia. • Express delivery is available subject to a surcharge. Contact Baresque for details and pricing.
Suggested Installation	Reverse hang / overlap and double cut. Baresque recommends and supply Roman brand adhesives and primers.
Care Instructions	Use cloth with any of the following in preferred order of use: 1: Clear warm water 2: Mild solution of liquid detergent and warm water 3: Isopropyl Alcohol (a.k.a. rubbing alcohol) Remove any detergent with a clean, damp cloth. Gently pat dry. For more difficult stains, dampen a soft white cloth with a solution of household bleach (10% bleach / 90% water). Rub gently. Rinse with a water dampened cloth to remove bleach concentration. Do not use solvent based or concentrated abrasive cleaning agents, lacquer thinners or nail polish remover as these may cause discolouration over a period of time. Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.
Warranty	5-year warranty. Visit **baresque.com.au/warranty** for complete details.

LENOX

Colour & Finish Options

COLOURWAY CARD

LENOX COLOURWAY CARD

AVF26-029 CHIFFON



AVF26-050 STREET CAR

AVF26-106 OATMILK

AVF26-157 TAPESTRY

AVF26-336 HARBOUR



AVF26-463 RAWLIN

AVF26-572 FIRED BRICK

AVF26-729 OPTIMIST

AVF26-814 PAVEMENT

AVF26-814 PLATINUM



AVF26-835 HUDSON

AVF26-851 NIGHT LIFE